


FEATURE

- . Compression & Tension S-beam load cell
- . Optimal for hanging measurement equipment
- . Small size
- . Protection class : IP65

SPECIFICATION

MODEL	CSBAS
Rated capacity (R.C.)	10, 20 kgf
Rated output (R.O.)	2.0 ± 0.1 mV/V
Zero balance	0 ± 0.03 mV/V
Combined error	0.1% R.O.
Repeatability	0.05% R.O.
Creep for 30 min	0.1% R.O.
Temp. effect on zero value	0.05% / 10°C
Temp. effect on output value	0.05% / 10°C
Excitation recommended	10V DC
Excitation maximum	15V DC
Terminal resistance, input	350 ± 3.5Ω
Terminal resistance, output	350 ± 3.5Ω
Insulation resistance	> 2000MΩ @ 50V DC
Compensated temperature range	-10 to +40°C
Operating temperature range	-20 to +70°C

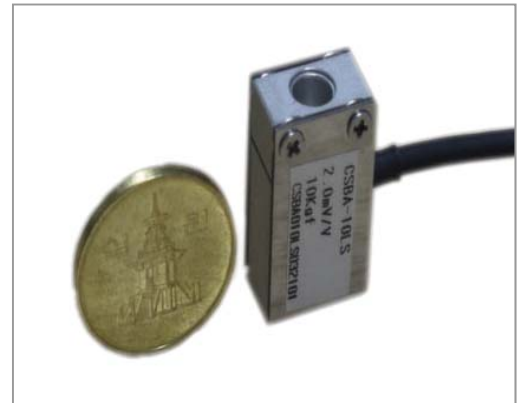

- Material
Anodized Aluminium
- Cable
Braided Shield 4-wire round cable with PVC-jacket

DIMENSION (mm)

